



TRY OUR VISUALISER

FIN*floor*TM
total floor solution

2025



COVER IMAGE: SAPPHIRE GARNET



Finfloor SA is a member of SAWLFA and the products within this catalogue conform to SAWLFA prescribed standards

NOTE: The images in this catalogue are a representation only and colours may vary from actual product. It is recommended to see actual samples before placing an order.

CONTENTS

Engineered Oak flooring **pg 4 - 19**

FINOak Pre-finished	pg 6-11
FINOak Unfinished	pg 12-13
Jax Oleum Custom Wood Stains	pg 14-15
FINOak Jax Oleum Pre-finished	pg 16-19

Vinyl Flooring **pg 20 - 31**

Glue down - Aurora II	pg 22-23
Glue down - Galaxy II	pg 24-25
FINCrete	pg 26-27
Sapphire SPC Wide	pg 28-29
Diamond Core SPC +	pg 30-31

Laminate flooring **pg 32 - 45**

AGT - Bella	pg 34-35
AGT - Natura	pg 36-37
AGT - Armonia	pg 38-39
Black Forest +	pg 40-41
Authentic Herringbone	pg 42-43
FINLine	pg 44-45

Underlays, Profiles and Skirting **pg 46**

Icon Key

-  Four sided, painted V-groove
-  Square edge - for a seamless floor with no visible joins
-  Four sided bevelled edge
-  Four sided painted micro bevelled edge
-  CMP - For engineered wood flooring we are able to stain the solid Oak profiles to match the floor
- CCP - For vinyl and laminate flooring we have a standard selection of recommended wrapped aluminium or MDF Colour complementing profiles available

OAK FLOORING

OAK WOOD FLOORING

Oak hardwood flooring adds lasting beauty and value to your home. Known for its strength and durability, it's a popular choice for homeowners.

All our oak floors come in **rustic grading**, highlighting natural knots, cracks, and grain variations. This adds unique charm and warmth to any space. Available in shades from light to dark, oak can be stained to suit any style. Its natural grain pattern helps hide minor scratches, reducing maintenance. Choose from smooth or wire-brushed finishes to achieve a modern, aged, or weathered look. FINOak offers a 25-year warranty across a range of sizes, thicknesses, and finishes.

5 Benefits of Engineered Oak Wood Flooring:



Enhanced Durability: Engineered oak flooring is built with multiple layers, making it more resistant to wear, moisture, and temperature changes than solid wood. This makes it ideal for areas with high foot traffic or fluctuating humidity levels.

Moisture Resistance: Unlike traditional hardwood, engineered oak has better resistance to moisture and humidity, reducing the risk of warping or swelling.

Versatile Installation: Engineered oak can be installed in a variety of ways (floating or glued), and over different types of subfloors, including concrete. Remember to increase the size of your expansion gap in coastal regions.

Cost-Effective: While maintaining the look and feel of solid hardwood, engineered oak uses less solid wood, making it more budget-friendly without compromising on aesthetics or quality.

Eco-Friendly: The layered construction of engineered flooring uses less precious and slow growing Oak compared to solid hardwood. This makes it a more sustainable option, contributing to the conservation of natural resources while still offering the timeless appeal of oak.

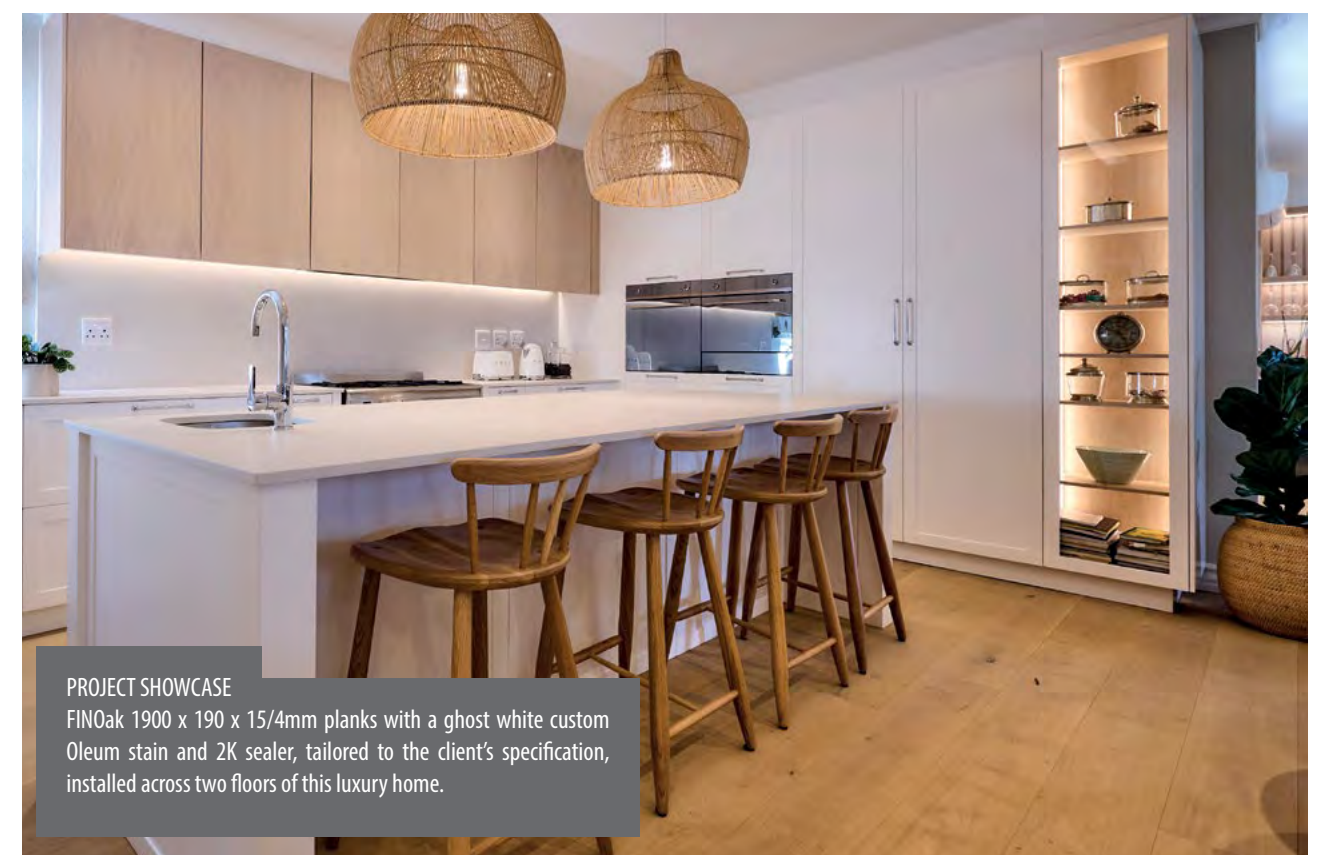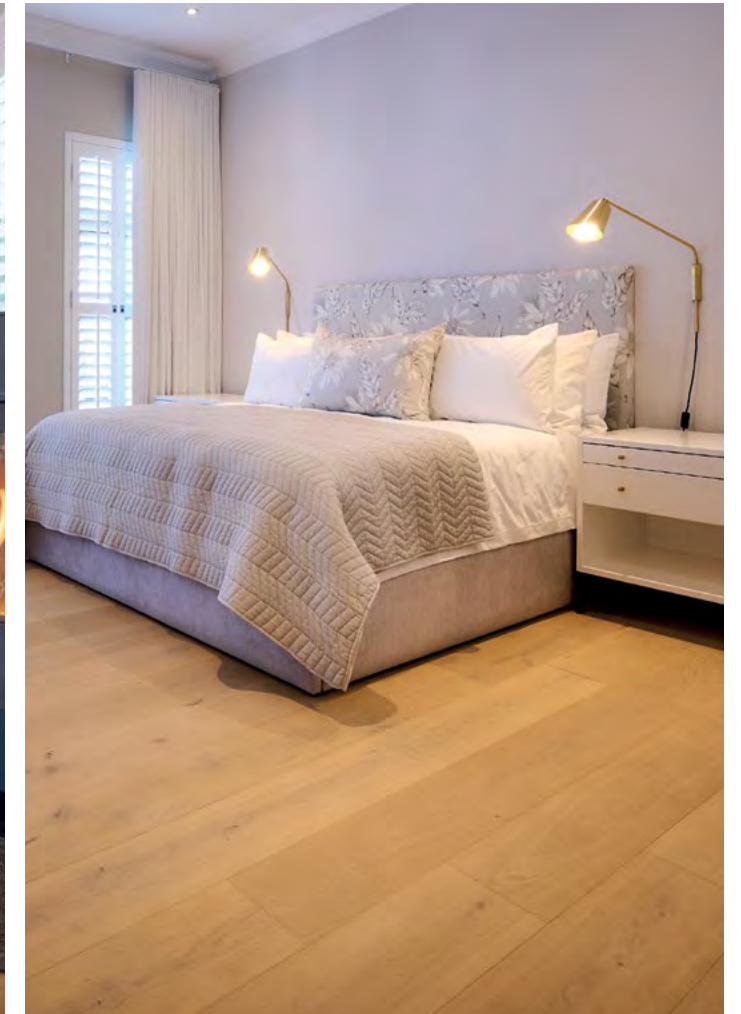

PROJECT SHOWCASE

FINOak 1900 x 190 x 15/4mm planks with a ghost white custom Oleum stain and 2K sealer, tailored to the client's specification, installed across two floors of this luxury home.


FINOak

Engineered Hardwood Flooring



SIMILAR TO LEBOMBO (ABOVE)

14/3MM PRE-FINISHED OAK FLOORING

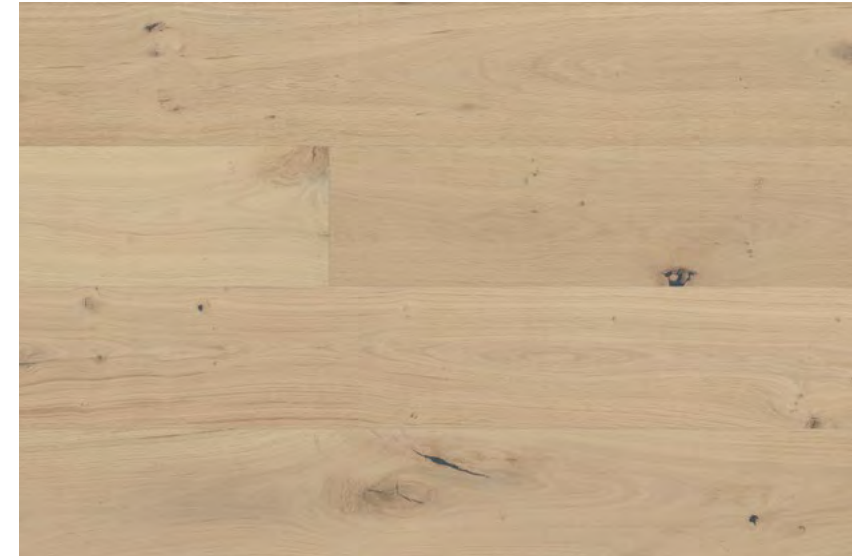

LEBOMBO - BEV

CMP - Custom stain solid Oak


PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1900 x 190 x 14/3mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 3mm lightly brushed Oak with PROFF and BERGOLIN invisible lacquer
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Factory finishing process
 3 x primer coat
 2 x UV lacquer top coat
 5 x UV lamp drying



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

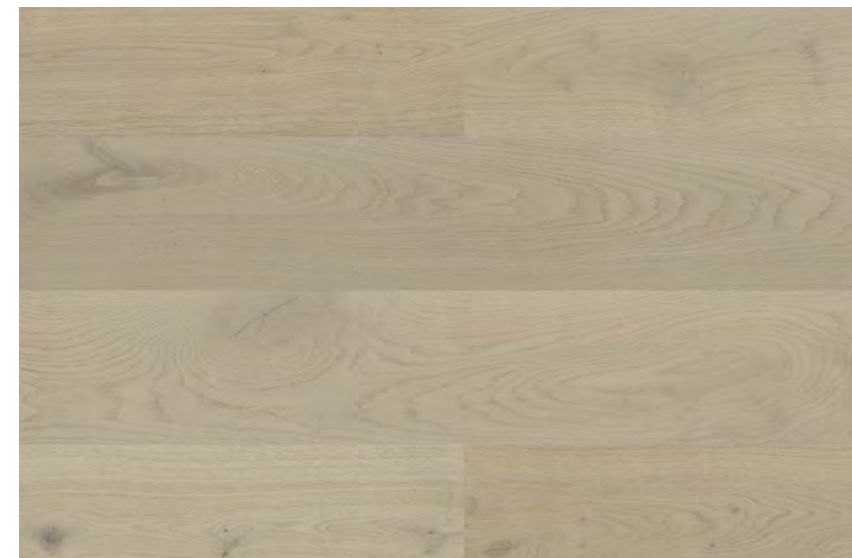

TAFELBERG - BEV


CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 190 x 14/3mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 3mm lightly brushed Oak, with white matt lacquer from BERGOLIN
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Factory finishing process
 3 x primer coat
 2 x UV lacquer top coat
 5 x UV lamp drying



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

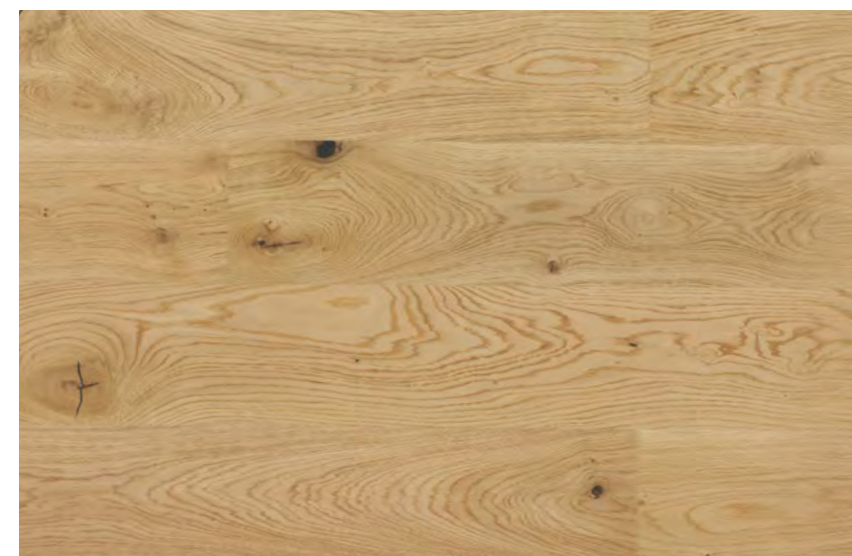

AMATOLA - BEV

CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 190 x 14/3mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 3mm lightly brushed Oak, with natural matt lacquer from BERGOLIN
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Factory finishing process
 3 x primer coat
 2 x UV lacquer top coat
 5 x UV lamp drying



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

FINOak

Engineered Hardwood Flooring



WINTERBERG (ABOVE)

14/3MM PRE-FINISHED OAK FLOORING

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1900 x 260 x 14/3mm
 Packaged: 3.952sqm - 8 pieces / box
 Top Face: 3mm lightly brushed Oak top face with LOBA matt lacquer and invisible UV oil
 Core: 10mm 3-ply Pine core with a 1mm Pine back

Factory finishing process
 2 x Invisible oil and UV lamp drying
 3 x primer coat
 2 x UV oil top coat
 5 x UV lamp drying



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

WINTERBERG -

CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 260 x 14/3mm
 Packaged: 3.952sqm - 8 pieces / box
 Top Face: 3mm lightly brushed smoked Oak top face white oiled and white waxed with American Wood Oil
 Core: 10mm 3-ply Pine core with a 1mm Pine back

Factory finishing process
 Smoked, white oiled and white wax oiled.
 The smoked veneer is fumigated in a closed smoke kiln.
 The colour of the smoke permeates the whole veneer making it more natural. This product is dried naturally over 1-2 days.



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

TSITSIKAMA -

CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 260 x 14/3mm
 Packaged: 3.952sqm - 8 pieces / box
 Top Face: 3mm lightly brushed, hand scraped smoked Oak top face, naturally lacquered with ATLAS Matt lacquer
 Core: 10mm 3-ply Pine core with a 1mm Pine back

Factory finishing process
 Smoked, then hand-scraped and natural matt lacquered.
 The smoked veneer is fumigated in a closed smoke kiln.
 The colour of the smoke permeates the whole veneer making it more natural. This product is dried naturally over 1-2 days.



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

KAROO -

CMP - Custom stain solid Oak


FINOak

Engineered Hardwood Flooring



OUTENIQUA (ABOVE)

15/4MM PRE-FINISHED OAK FLOORING

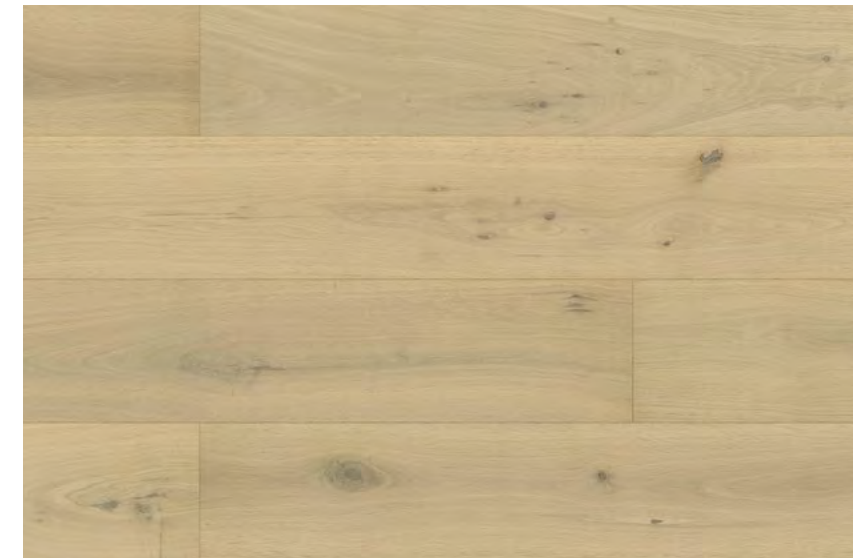

CEDERBERG - BEV

CMP - Custom stain solid Oak


PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1900 x 190 x 15/4mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 4mm lightly brushed Oak top face with LOBA Invisible UV lacquered
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Finishing process
 3 x primer coat
 2 x UV sealing coats
 9 x UV curing lamps and drying tunnels



Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

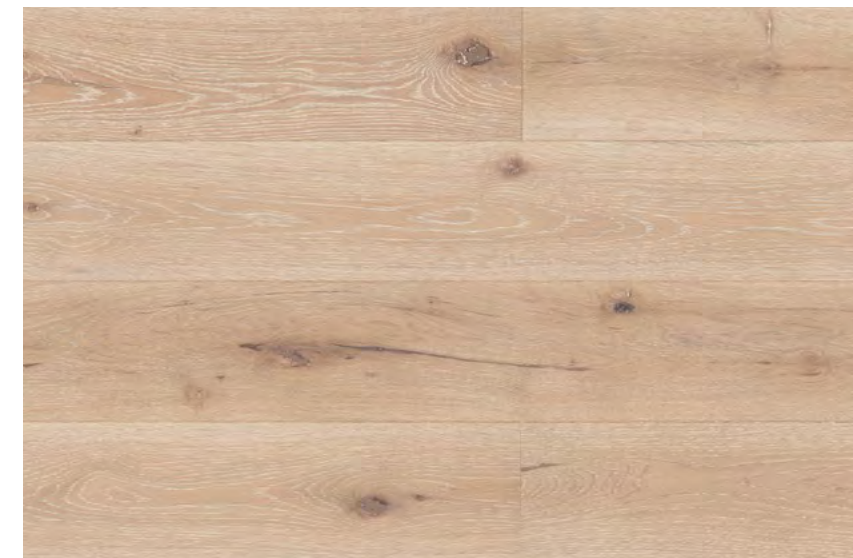

MALUTI - BEV


CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 190 x 15/4mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 4mm lightly brushed and white washed Oak top face with KLUMPP UV lacquer
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Finishing process
 3 x primer coat
 2 x UV sealing coats
 9 x UV curing lamps and drying tunnels

KLUMPP

Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

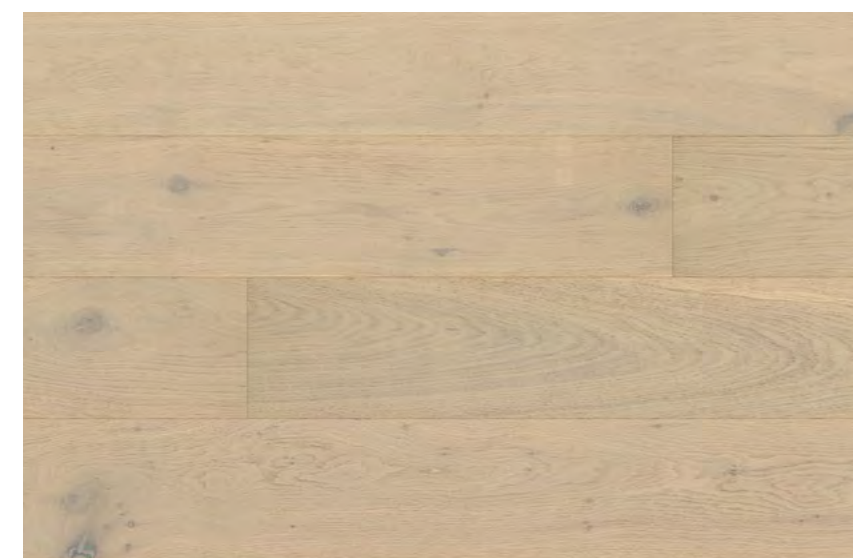

OUTENIQUA - BEV

CMP - Custom stain solid Oak

Plank Dimensions: 1900 x 190 x 15/4mm
 Packaged: 2.888sqm - 8 pieces / box
 Top Face: 4mm lightly brushed and white stained Oak top face with KLUMPP UV lacquer
 Core: 10mm 3-ply Poplar core with a 1mm Poplar back

Finishing process
 3 x primer coat
 2 x UV sealing coats
 9 x UV curing lamps and drying tunnels

KLUMPP

Coverage: 12 x 12m floating installation
 Expansion gap: 12-15mm is required
 Warranty: 25 years limited manufacturer's warranty

FINOak UNFINISHED

FINOak UNFINISHED PLANK OPTIONS



FINOak UNFINISHED Rustic

Available Plank Dimensions:

1900 x 190 x 15/4mm

Packaged: 2.888sqm - 8 pieces / box

Top Face: 4mm Unfinished Oak, Smooth

Core: 10mm 3-ply Poplar core with a 1mm Poplar back

2200 x 220 x 15/4mm

Packaged: 2.904sqm - 8 pieces / box

Top Face: 4mm Unfinished Oak, Smooth

Coverage: 12 x 12m floating installation


Expansion gap: 12-15mm is required

Warranty: 25 years limited manufacturer's warranty



UNFINISHED OAK RUSTIC - BEV

CMP - Custom stain solid Oak

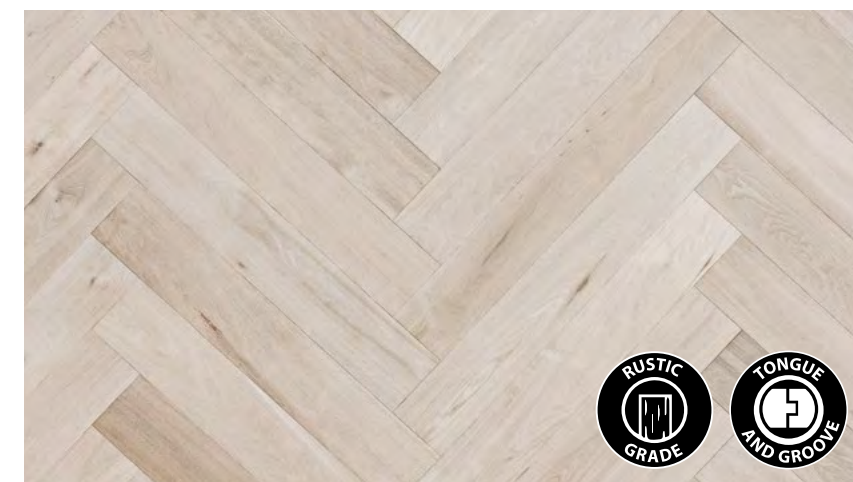

FINOak HERRINGBONE Rustic

Available Plank Dimensions:

600 x 125 x 14/3mm

Packaged: 1.5sqm - 20 pieces / box

Top Face: 3mm lightly sanded Unfinished Oak

Core: 10mm Poplar and Eucalyptus Multi-ply core with a 1mm backing board

Coverage: 12 x 12m floating installation

Expansion gap: 12-15mm is required and to be fitted as a fully-bonded glue-down installation

Warranty: 25 years limited manufacturer's warranty



UNFINISHED HERRINGBONE OAK RUSTIC - BEV

CMP - Custom stain solid Oak

NOTE! INSTALLATION METHOD

Although our FINOak flooring range comes with an easy click installation system any of the above FINOak planks can be installed as a glue down installation. Thereby increasing the floor coverage allowance and reducing or negating the use of expansion profiles.



[Left] A FINOak (1900 x 190 x 15/4mm) unfinished wood floor with a custom Oleum Smoke stain and 2K sealer in a commercial restaurant setting.

The 2K sealer not only seals the floor but also increases durability, ensuring long-lasting protection.

We recommend 2K sealer over any custom stain for superior performance and preservation of the floor's finish.

1900 X 190 X 15/4MM UNFINISHED FINOAK PLANK WITH
OLEUM SMOKE + 2K SEALER (ABOVE)

JAX OLEUM CUSTOM COLOUR WOOD STAIN - SELECT YOUR COLOUR



Jax Oleum is an incredibly effective and durable single coat, oil based wood stain that protects, nourishes and colours wood in one very easy application.

It can be applied to any type of uncoated wood, used for both interior or exterior applications and works successfully with other over coat brands.

Proudly made in South Africa, Jax Oleum is a global green tag certified product with low VOC emissions. With over 70 colours to choose from the possibilities are endless. These are some of our favorite trending colours.



Extra Extra White	Extra White	Bone
Natural	Light Grey	Grey
Wheat	Dark Wheat	Sand
Mist Grey	Corn Silk	Java
Storm Grey	Studio Grey	Sofa Grey
Clear	Cherry	Gun Metal
Dark Blue Grey	Sofa Storm	Ebony
Mahogany	Extra Dark Mahogany	Brown
Black	Extra Extra Black	2K Sealer



NOTE! Although it will increase the final cost, we recommend you use a 2K sealer with any custom colour



FINOAK HERRINGBONE WITH OLEUM BARE + 2K SEALER (ABOVE)



JAX OLEUM LOCALLY PRE-FINISHED OAK FLOORING



EBONY - BEV

CMP - Custom stain solid Oak

PRODUCT INFORMATION AND WARRANTY

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Ebony Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with 
1 x Ebony colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty



DARK OAK - BEV


CMP - Custom stain solid Oak

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Dark Oak Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with 
1 x Dark Oak colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty

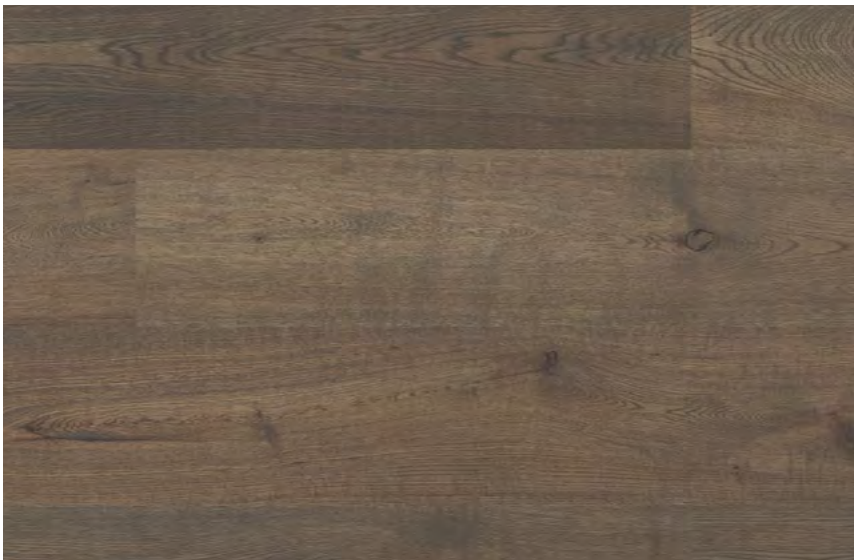

SOFA GREY - BEV

CMP - Custom stain solid Oak

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Sofa Grey Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with 
1 x Sofa Grey colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty



DARK OAK



Jax Oleum
PRE-FINISHED



WALNUT

JAX OLEUM LOCALLY PRE-FINISHED OAK FLOORING



SAND - BEV

CMP - Custom stain solid Oak

PRODUCT INFORMATION AND WARRANTY

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Sand Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with *Jax Oleum*
1 x Sand colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty



WALNUT - BEV


CMP - Custom stain solid Oak

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Walnut Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with *Jax Oleum*
1 x Walnut colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty

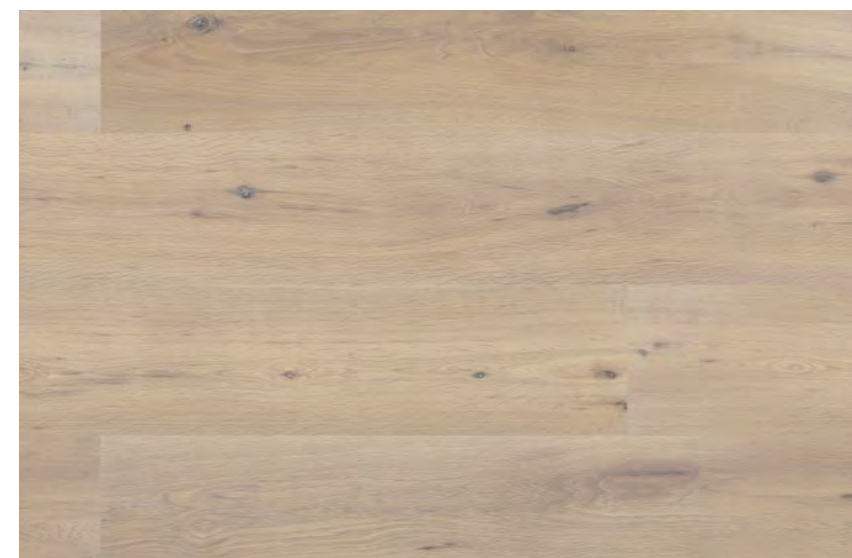

EXTRA WHITE - BEV

CMP - Custom stain solid Oak

Available in the following plank dimensions:
1900 x 190 x 15/4mm
2200 x 220 x 15/4mm
600 x 125 x 14/3 herringbone plank

Top Face: Rustic Oak with Jax Oleum Extra White Stain and 2K sealer

Finishing process
Locally finished at the Jax factory with *Jax Oleum*
1 x Extra White colour coat
2 x 2K sealer that is then dried naturally

Coverage: 12 x 12m floating installation
Expansion gap: 12-15mm is required
Warranty: 25 years limited manufacturer's warranty



VINYL FLOORING

VINYL FLOORING

Vinyl flooring is a popular option for busy households, offices, cafés, and commercial spaces due to its low maintenance, water resistance, affordability, and long lifespan. It provides the right balance of firmness and flexibility, offering a comfortable feel underfoot.

Top 5 Reasons to Choose Vinyl Flooring

Low Maintenance: Vinyl flooring requires minimal upkeep—just regular sweeping and occasional mopping to keep it looking great.

Durability: With SUPER UV commercial-grade wear layers, our vinyl plank flooring is built to withstand heavy foot traffic, making it ideal for both residential and commercial spaces.

Water Resistance: Vinyl's water-resistant properties make it perfect for kitchens, bathrooms, and other moisture-prone areas.


Affordability: Vinyl offers an excellent balance of quality and cost-effectiveness, making it a budget-friendly flooring option.

Versatility in Design: Advances in technology have introduced a wide range of finishes, textures, and styles, allowing vinyl flooring to mimic natural materials like wood or stone while remaining practical.



PROJECT SHOWCASE

Seamless installation of Galaxy II - Bode glue-down vinyl flooring flowing beautifully through the open-plan living and dining areas, up the staircase, and into the first-floor bedrooms

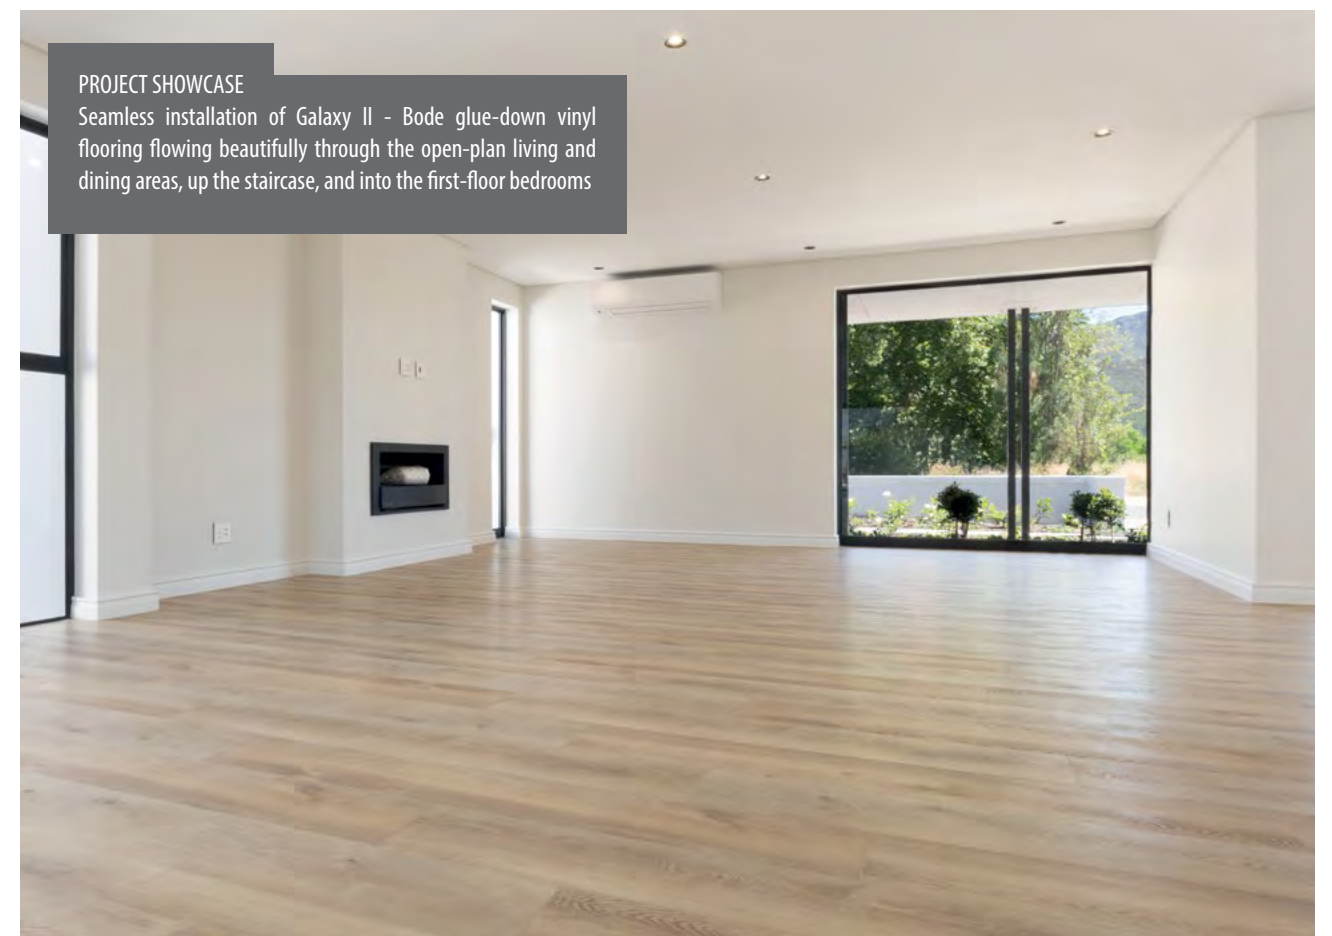



AURORA II

Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1220 x 228.6 x 2mm

Packaged: 5.58sqm - 20 pieces / box

Coverage: Glue down installation - seamless floor application

Core: Extruded virgin vinyl (LVT) core

Wear Layer: 0.3mm UV resistant wear layer

Warranty: 20 years heavy domestic / 5 years light commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN660-1/2	Group T
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2 EN13501-1 EN ISO 9239-1	Bf1-S1



INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification



Heavy Domestic
(Class 23)

Light Commercial
(Class 31)

AURORA II GLUE DOWN VINYL




DIONE - WOOD EMBOSS - BEV

CCP - Mist Oak / Beach sand



JULIET - WOOD EMBOSS - BEV

CCP - Mist Oak / Beach sand

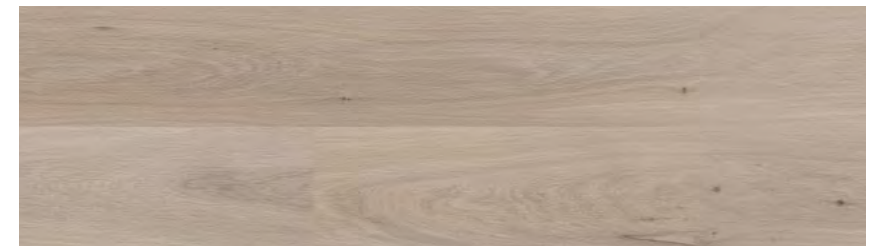


CELESTE - WOOD EMBOSS - BEV

CCP - Mist Oak / Sandstone




PORTIA - WOOD EMBOSS - BEV

CCP - Meva Oak

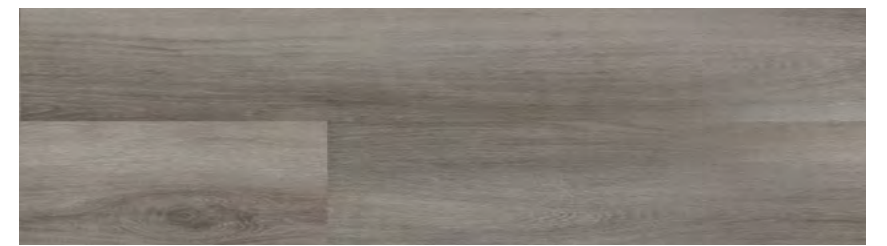

ELARA - WOOD EMBOSS - BEV

CCP - Walnut / Sandstone

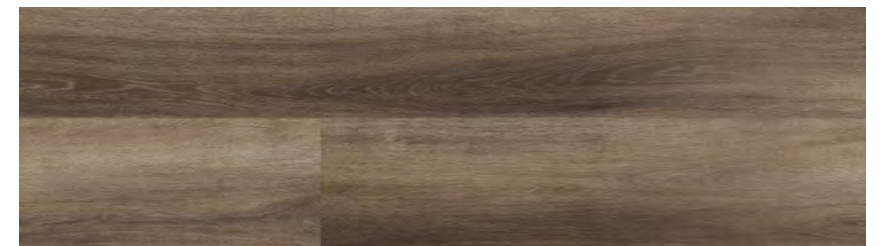

HAYLEY - WOOD EMBOSS - BEV

CCP - Walnut



GALAXY II

Glue down LVT

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1526 x 230 x 2.5mm
Packaged: 4.914sqm - 14 pieces / box
Coverage: Glue down installation - seamless floor application
Core: Extruded virgin vinyl (LVT) core
Wear Layer: 0.5mm Super UV wear layer
Warranty: Lifetime domestic / 10 years heavy commercial grade


 Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN660-1/2	Group T
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2	Bfl-S1
	EN13501-1	
	EN ISO 9239-1	



GALAXY II GLUE DOWN VINYL

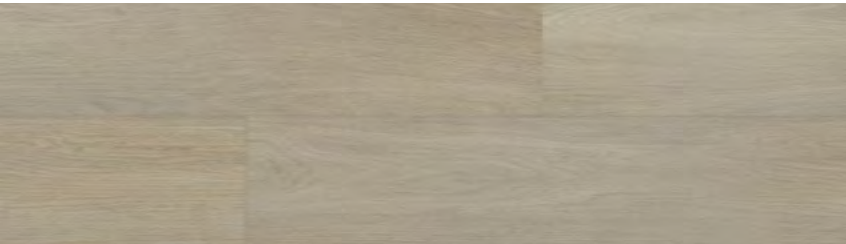

SAURON - WOOD EMBOSS -  CCP - Mist Oak / Sandstone



BODE - EIR -  CCP - Meva Oak



DRACO - WOOD EMBOSS -  CCP - Sandstone / Walnut



MALIN - WOOD EMBOSS -  CCP - Meva Oak / Walnut



HOAG - EIR -  CCP - Sandstone



COMA - WOOD EMBOSS -  CCP - Sandstone / Stone Grey


DRACO (ABOVE)

INTERNATIONAL CERTIFICATION





EN ISO 10582 - Fit for use classification



Heavy Commercial (Class 33)




FINCRETE

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 908.4 x 451.2 x 2.5mm
Packaged: 3.279 sqm - 8 pieces / box

Coverage: Glue down installation - seamless floor application
Core: Extruded virgin vinyl (LVT) core
Wear Layer: 0.55mm Super UV wear layer
Warranty: 30 years heavy domestic / 10 years general commercial grade



CEMENTITIOUS GLUE DOWN

With a SUPER UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Scratch appearance assessment	EN14565:2004(E)	≥ 20N Discontinuous scratch marks
Slip resistance	EN12893	Class DS
Toxic element test	EN71-3	Pass, Not Toxic - Doesn't contain heavy metals or formaldehyde
Fire classification	EN ISO11925-2 EN13501-1 EN ISO 9239-1	Bf1-S1

SMOKE CGI IMAGE (ABOVE)

INTERNATIONAL CERTIFICATION



EN ISO 10582 - Fit for use classification




Heavy Commercial
(Class 33)

FINCRETE GLUE DOWN VINYL



ASH - CORAL FINISH - BEV

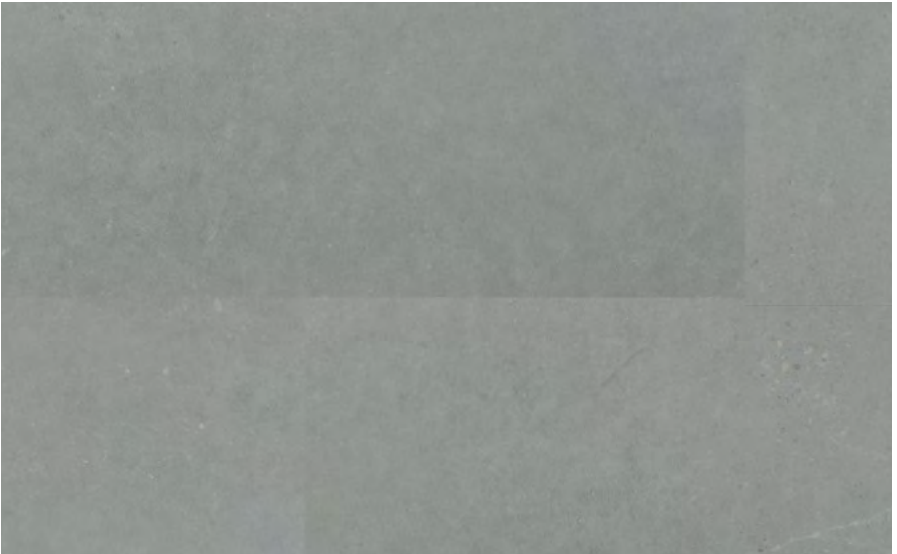

SMOKE - CORAL FINISH - BEV



FLINT - CORAL FINISH - BEV



Sapphire SPC WIDE Board

GARNET (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1230 x 228 x 5.5mm

Packaged: 2.24sqm - 8 pieces / box

Coverage: 10 x 15 lin.m in length / width before a 10mm expansion gap is required

Core: Rigid SPC core, with 1mm IXPE underlay attached to the back

Wear Layer: 0.3mm Super UV wear layer

Warranty: 20 years heavy domestic / 5 years light commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2:1999/ EN 549-2011	Group T
Slip resistance	EN 1404+AC	Class DS
Formaldehyde emissions	EN 1404:2004 + AC:2006	Class E1
Fire classification	EN 13501-1 EN1404 + AC	Bf1-S1




SAPPHIRE SPC WIDE



JASPER - EIR - BEV



CCP - Mist Oak

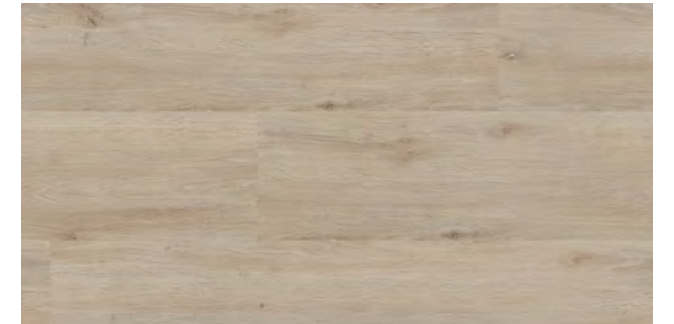

MORGANITE - ANTIQUE WOOD TEXTURE - BEV




CCP - Washed Oak




GARNET - ANTIQUE WOOD TEXTURE - BEV



CMP - Mist Oak

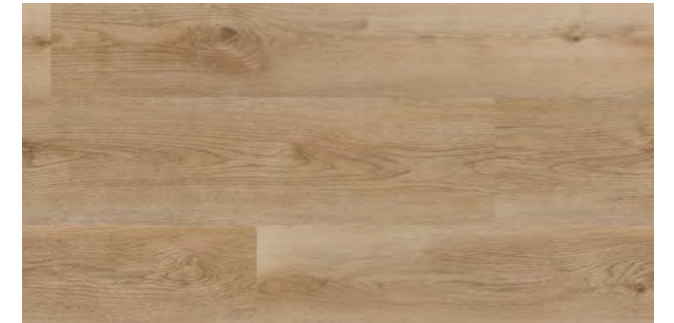

PYRITE - EIR - BEV




CCP - Meva Oak



CITRINE - ANTIQUE WOOD TEXTURE - BEV



CCP - Yellow Gum / Meva Oak

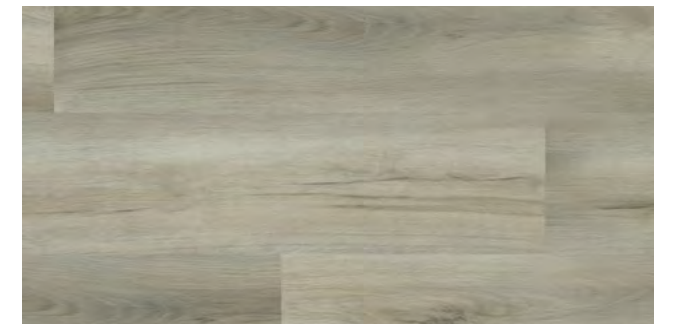

JONQUIL - ANTIQUEWOOD TEXTURE - BEV




CCP - Stone Grey / Sandstone



PACIFIC OPAL - ANTIQUE WOOD TEXTURE - BEV



CCP - Everest

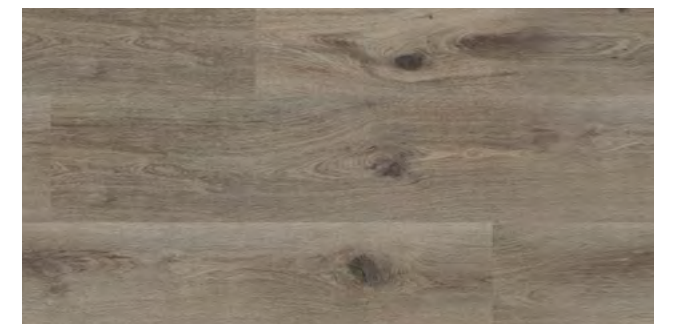

TIGERS EYE - ANTIQUE WOOD TEXTURE - BEV



CCP - Sand Oak / Sandstone

INTERNATIONAL CERTIFICATION





DIAMOND CORE SPC+

CUPRITE (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1500 x 228 x 6.5mm

Packaged: 2.052sqm - 6 pieces / box

Coverage: 15 x 15 lin.m in length / width before a 10mm expansion gap is required

Core: Rigid SPC core, with 1mm IXPE underlay attached to the back

Wear Layer: 0.5mm Super UV wear layer

Warranty: 30 years heavy domestic / 5 years general commercial grade



Super UV Protect Wear Layer

With a double layer of UV protect wear layer that increases the scratch, wear and stain resistance of the product

Technical specifications	EN Norms	Result
Wear resistance	EN 660-2	Group T
Slip resistance	EN 1404	Class DS
Formaldehyde emissions	EN 14041	Class E1
Fire classification	EN 13501-1 EN1404	Bf1-S1



DIAMOND CORE SPC+




ALABASTER - ANTIQUE WOOD - 

 CCP - Sand Oak / Everest




CUPRITE - RANDOM EIR - 

 CCP - Sand Oak / Sandstone

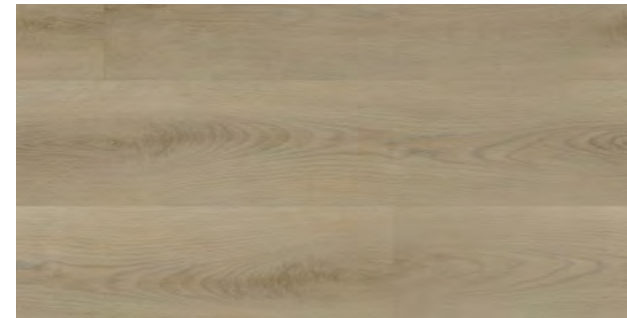


ZIRCON - RANDOM EIR - 

 CCP - Washed Oak

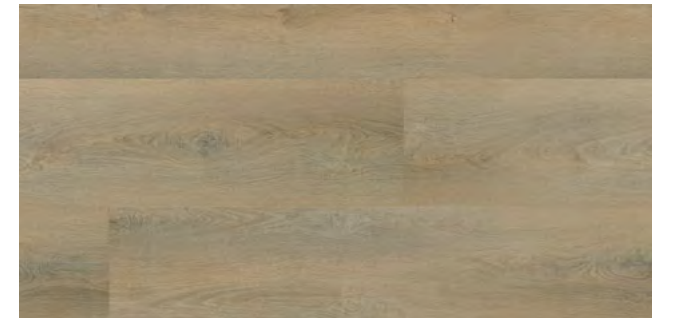


AMBER - RANDOM EIR - 

 CCP - Meva Oak

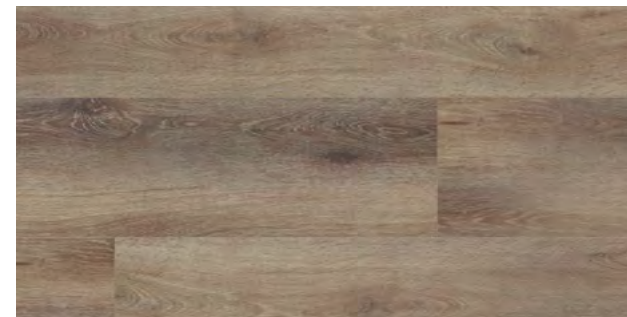

AGATE - ANTIQUE WOOD - 

 CCP - Walnut

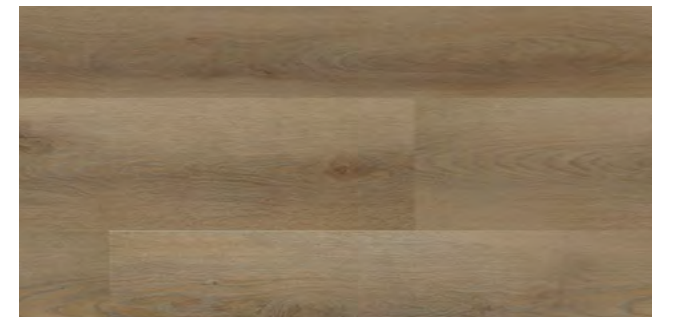


ONYX - RANDOM EIR - 

 CCP - Yellow Gum / Meva



JADE - EIR - 

 CCP - Walnut / Sand Oak

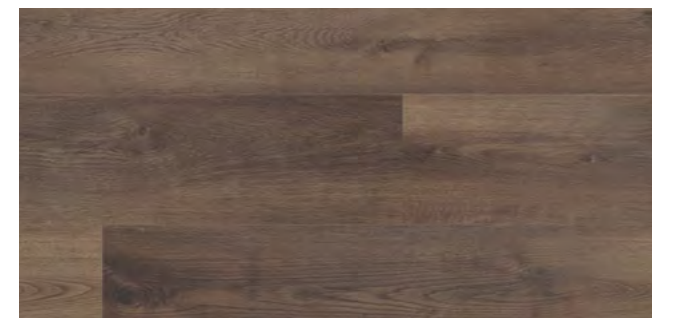

TEKTITE - EIR - 

 CCP - Walnut

INTERNATIONAL CERTIFICATION



LAMINATE FLOORING

Laminate flooring is an affordable, durable, and low-maintenance option that looks just like natural hardwood. Made from pressed wood fibers, it's more affordable than timber but still offers great performance. All Finfloor laminates come with an aluminum oxide layer, making them highly resistant to scratches, impact, and UV light. This means they can handle heavy foot traffic, kids, and pets without showing wear, and the UV protection keeps your floors from fading over time.

Top 5 Reasons to Install Laminate Flooring:

- **Cost-Effective** – Enjoy the look of real wood at a fraction of the price.
- **Durable** – Scratch, impact, and UV-resistant, perfect for homes with kids and pets.
- **Easy to Clean** – Its stain-resistant surface makes cleaning spills and marks simple.
- **Hypoallergenic** – Laminate leaves no gaps for dust or debris, helping reduce allergies.
- **Quick Installation** – Finfloor's easy lock-together system allows for fast, glue-free installation over most floors.

Advances in laminate technology make it almost identical to real wood, with detailed embossing that mimics both the look and feel of timber. Finfloor's aluminum oxide-coated laminate gives you the beauty and strength of natural wood with added ease of installation, durability, and minimal maintenance.



PROJECT SHOWCASE

FINline Olifants laminate flooring installed throughout a luxury home. From the spacious, open-plan kitchen to the lounge, dining rooms, and bedrooms, this premium laminate is 24-hour water-resistant with a low 5% swell rate, making it ideal for South Africa's living conditions and climate.



Bella Neo

CAMELLIA (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1200 x 191 x 8mm
 Packaged: 2.292sqm - 10 pieces / box

Coverage: 9 x 9 lin.m in length / width before a 10/12mm expansion gap is required
 Core: 8mm HDF. Core with an average board density > 860-880 kg/m³
 Fit for use grading: AC3/W31 – Moderate commercial / Heavy domestic
 Warranty: 15 years heavy domestic / 5 years moderate commercial use

VIVA finish

BELLA with Viva finish that replicates the feel and texture of real wood and a square edge that creates a seamless flooring pattern with no visible plank lines

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC3/W31
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



CAMELLIA - VIVA FINISH -

CCP - Alpine Oak / Beach Sand Oak



ANEMON - VIVA FINISH -

CCP - Beach Sand Oak



VEGAS - VIVA FINISH -

CCP - Alpine Oak




MAGNOLIA - VIVA FINISH -

CCP - Alpine / Beach Sand Oak



FREZYA - VIVA FINISH -

CCP - Mist Oak / Sandstone

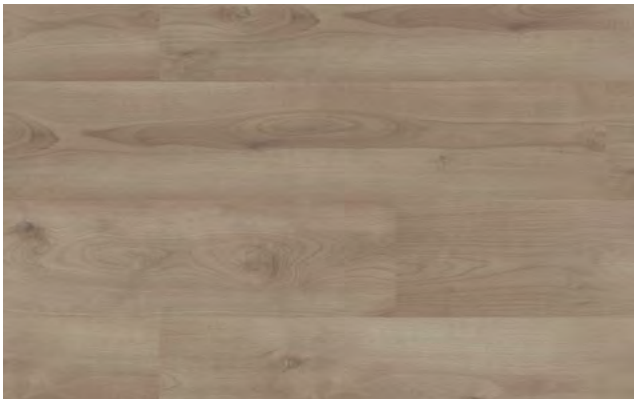

YUKA - VIVA FINISH -

CCP - Washed Oak / Mist Oak



GARDENIA - VIVA FINISH -

CCP - Sandstone / Mist Oak



DEFNE - VIVA FINISH -

CCP - Walnut / Chocolate Bronze



MERIC (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1200 x 191 x 8mm
Packaged: 1.83sqm - 8 pieces / box

Coverage: 10 x 12 lin.m in length / width before a 10/12mm expansion gap is required
Core: 8mm HDF. Core with an average board density > 850-900 kg/m³
Fit for use grading: AC4/W32 – General commercial / Heavy domestic
Warranty: 20 years heavy domestic / 5 years general commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 12%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



SALDA - WOOD EMBOSSED - 

 CCP - Everest / Stone Grey



LENA - WOOD EMBOSSED - 

 CCP - Sand Oak / Sandstone




MERIC - WOOD EMBOSSED - 

 CCP - Sand Oak / Sandstone




ILGAZ - WOOD EMBOSSED - 

 CCP - Mist Oak / Meva Oak

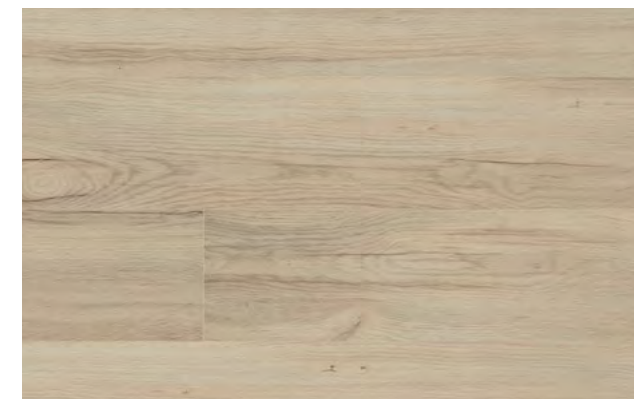


GALA OAK - WOOD EMBOSSED - 

 CCP - Washed Oak / Mist Oak

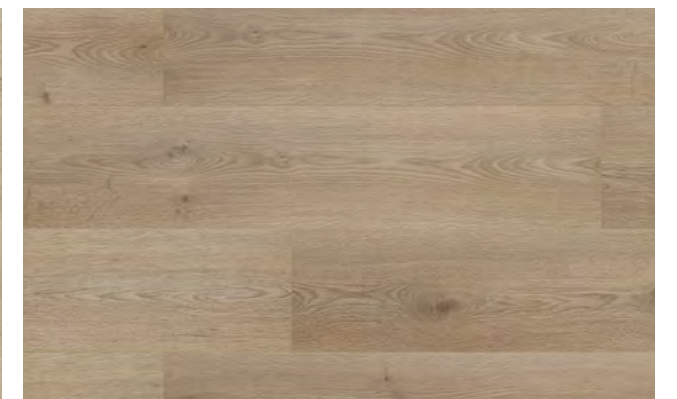


TREND - WOOD EMBOSSED - 

 CCP - Meva / Mist Oak

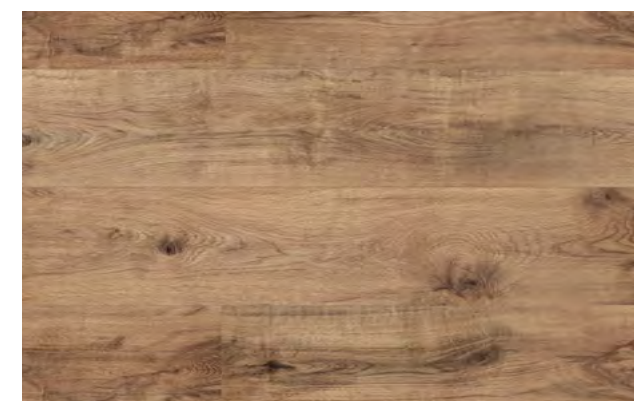

RHODES - WOOD EMBOSSED - 

 CCP - American Oak

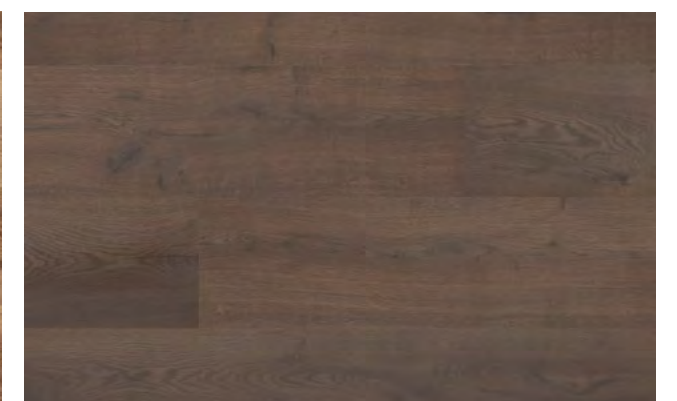

TALYA - WOOD EMBOSSED - 

 CCP - Walnut / Chocolate Bronze



ARMONIA

LARGE

SORENTO (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1380 x 246 x 8mm
 Packaged: 2.376 sqm - 7 pieces / box

Coverage: 10 x12 lin.m in any direction before a 10 -12mm expansion gap is required
 Core: 8mm HDF Core with an average board density > 850-900 kg/m³
 Fit for use grading: AC4/W32 – General commercial / Heavy domestic
 Warranty: 20 years heavy domestic / 5 years general commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 18%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC1



NAPOLI - MOORLAND FINISH - 

 CCP - White / Everest



RAVELLO - MOORLAND FINISH - 

 CCP - Alpine Oak




MINORI - MOORLAND FINISH - 

 CCP - Alpine Oak



TOSCANA - MOORLAND FINISH - 

 CCP - Meva Oak

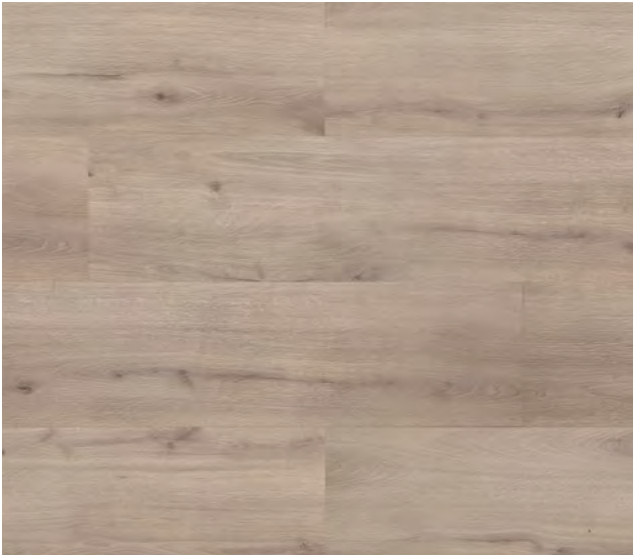

SORENTO - MOORLAND FINISH - 

 CCP - Mist Oak / Washed Oak



PALERMO - MOORLAND FINISH - 

 CCP - Chocolate Bronze



black forest+

SUN KISSED OAK (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 2200 x 236 x 12mm
Packaged: 2.596sqm - 5 pieces / box

Coverage: 20 x 20 lin.m in length / width before a 12/15mm expansion gap is required
Core: Water-resistant Compact Core + with average board density > 950 kg/m³
Fit for use grading: AC5/W33 – Heavy commercial / Heavy domestic
Warranty: 30 years heavy domestic / 10 years heavy commercial use

Black Compact Core +




Black HDF Compact Core + is 72 hours topically water resistant with a low 5% swell rate after full board immersion making these planks more resistant to moisture damage.

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC5/W33 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 5%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



BLACK FOREST +

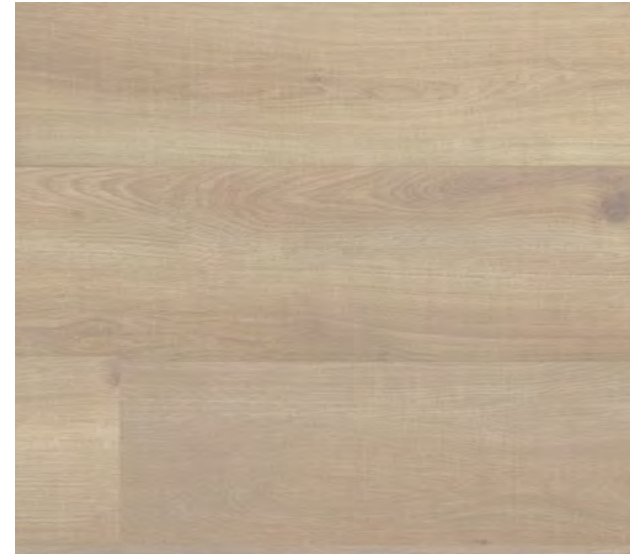

SUN KISSED OAK - RANDOM EIR -

CCP - Washed Oak / Meva Oak




WILD THORN - RANDOM EIR -

CCP - Meva / Washed Oak




MAPLE MIST - EIR -

CCP - Mist Oak

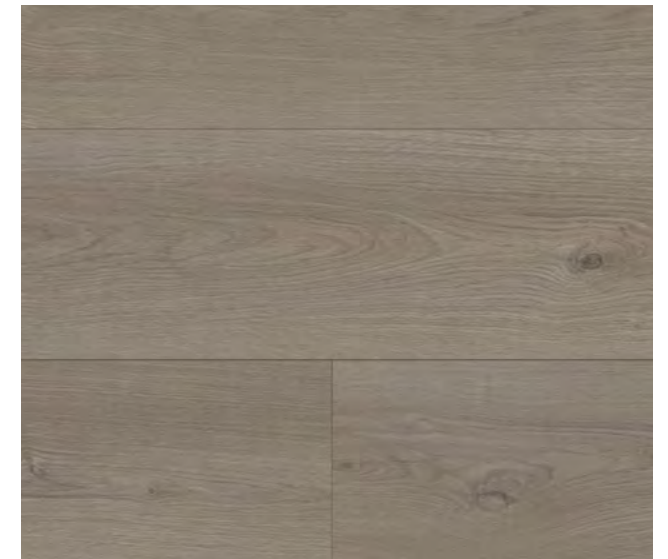

IRISH PINE - RANDOM EIR -

CMP - Sandstone

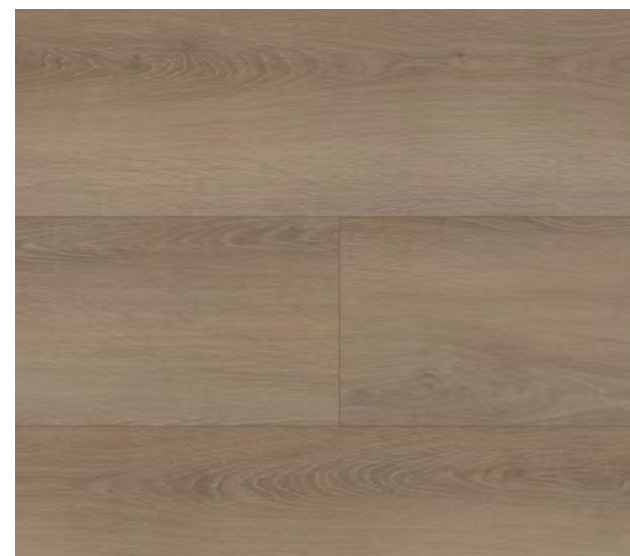

WYCHE ELM - RANDOM EIR -

CCP - Walnut



OAKWOOD VILLA - EIR -

CCP - Walnut



AUTHENTIC



herringbone

click laminate flooring

SUN BLEACHED OAK (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 600 x 100 x 12mm
 Packaged: 1.32sqm - 22 pieces / box, each box includes both A and B planks (not sold separately) and is suitable for floating or glue-down installation

Coverage: 12 x 12 lin.m in length / width before a 10/12mm expansion gap is required
 Core: 12mm HDF Core with an average board density > 880/890 kg/m³
 Fit for use grading: AC4/W32 – General commercial / Heavy domestic
 Warranty: 25 years heavy domestic / 5 years general commercial use

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling < 10%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2

AC4/W32-14

32

GENERAL COMMERCIAL

COMMERCIAL

5

YEAR

WARRANTY

DOMESTIC

25

YEAR

WARRANTY

1 PLANK

10

LAYING PATTERNS

LESS THAN

10%

SWELL RATE

THICKNESS

12

mm HDF CORE

CLICK

EASY

INSTALLATION

IMPACT

RESISTANT

V4

4 SIDED

V-GROOVE

AUTHENTIC HERRINGBONE



SUN BLEACHED OAK - MATT WOOD GRAIN - 

 CCP - Mist Oak / Washed Oak








WALNUT - MATT WOOD GRAIN - 






 CCP - Walnut

AUTHENTIC HERRINGBONE LAYING PATTERNS

Herringbone laying patterns

Basket weave laying patterns



FINLINE

OLIFANTS (ABOVE)

PRODUCT INFORMATION AND WARRANTY

Plank Dimensions: 1218 x 196 x 8mm
Packaged: 1.91sqm - 8 pieces / box

Coverage: 10 x 12 lin.m in length / width before a 10/12mm expansion gap is required
Core: Water-resistant HDF. Core with an average board density > 880/890 kg/m³
Fit for use grading: AC4/W32 – General commercial / Heavy domestic
Warranty: 25 years heavy domestic / 5 years general commercial use

Water resistant laminate

With a wax impregnated core and waxed edges on the locking system, FINLine is 24 hour topically water resistant and has one of the lowest swell rates available in the South African market

Technical specifications	Standard	Characteristic/Result
Wear resistance	EN 13329	AC4/W32 - V4
Stain resistance	EN 13329	Rating 5 - no visible change
Swelling test	EN 13329	Average swelling ≤ 10%
Light fastness	EN 13329	Grade 6 - No discolouration
Impact resistance	EN 13329	IC2



MARICO - RANDOM EIR -

CCP - Mist Oak / Washed Oak



SABIE - CROSS CUT LOW GLOSS -

CCP - Walnut / Meva Oak



ZAMBEZI - RANDOM EIR -

CCP - Mist Oak / Washed Oak



OLIFANTS - RANDOM EIR -

CCP - American Oak

UNDERLAYS AND ACCESSORIES



COMBILAY
2mm thick aerothene that is laminated onto a clear 80 micron virgin plastic moisture membrane, with a 100mm overlap on the one side that is to be taped down.

Made from virgin plastic

- Cushioning
- Moisture and mold resistant, Non-absorbent and rot resistant
- Protects flooring from moisture egress from screed
- Enhanced floor covering lifespan
- Minimal thermal properties - energy saving



FINIXPE
A premium acoustic underlay made up of a 2mm sound dampening high performance Irradiated Cross-Linked Polyethylene (IXPE) extra fine foam, with an overlapping 80 micron HDPE (High Density Polyethylene) vapour barrier, for extra moisture protection at the joints. Easy to install with easy peel tape to adhered to the 100mm overlap

- Sound absorbing
- Moisture and mold resistant
- Enhanced floor covering lifespan
- Increased thermal properties
- Increased acoustic properties
- Cushioning
- Non-absorbent and rot resistant
- Excellent rebound properties
- Energy saving
- Anti-static and anti-allergenic

LUX WRAP SKIRTING AND QUADS



DELUXE Skirting - Colour complementing
2700 x 90 x 16mm
Cover expansion gaps along walls

or **White XL Skirting - 2700 x 120 x 16mm**



FINQuad
2350 x 16 x 16mm
Cover expansion gaps along walls and cupboards.

MDF colour complementing skirting and quads are for use with all FINFLOOR laminate, vinyl and engineered wooden flooring ranges.

MDF WRAPPED PROFILES



Adaption Profile - 2350 x 45 x 12mm
For connection floor to adjacent lower surface



Transition Profile - 2350 x 45 x 12mm
For connection of floors of the same level



End Profile - 2350 x 35 x 12mm
For borders of different floor surfaces and front of sills



Stair Nose Profile - 2350 x 55 x 12mm
Used to cover the edge between riser and step

ALUMINIUM WRAPPED PROFILES



Adaption Profile - 2900 x 44 x 10mm
For connection floor to adjacent lower surface



Transition Profile- 2900 x 36.4 x 8,5mm
For connection of floors of the same level



Vinyl End Profile - 2900 x 27.7 x 5mm
Borders of different floor surfaces and front of sills



Laminate End Profile - 2900 x 27.7 x 10mm
Borders of different floor surfaces and front of sills



Stair Nose Profile - 2900 x 34 x 20mm
Cover the edge between riser and step

Save time and money with a wide selection of ready-finished and colour complementing profiles. Affordable colour matching MDF profiles are for use with all our laminate ranges.

Aluminium profiles don't swell and are available with adjustable heights. They can be used with vinyl, laminate or engineered wood flooring installations with planks ranging from 4-18mm in height. End profiles come in 2 different heights, for use with laminate or vinyl installations. Specify end height on order and if they are for vinyl or laminate floors.



SCAN ME

USE OUR VISUALISER

Head Office JOHANNESBURG
Unit 2b
11 Olympia Street
Sandton

Head Office DURBAN
14 Cassiafield Grove
Springfield Park
Durban

Head Office CAPE TOWN
Unit IP3, Industria Park
6 Industria Road, Brakenfell
Cape Town